


No.	長さ l [m]	高さ (KBM) h1 [m] h2 [m]	面積 x (h1+h2) / 2 [m]	No.	長さ l [m]	高さ (KBM) h1 [m] h2 [m]	面積 x (h1+h2) / 2 [m]
1 - 2	7.794	512.80 512.80	3996.7632	17 - 18	3.690	512.80 512.80	1892.2320
2 - 3	8.040	512.80 512.80	4122.9120	18 - 19	4.029	512.80 512.80	2066.0712
3 - 4	7.036	512.80 512.80	3608.0608	19 - 20	3.867	512.80 512.80	1982.9976
4 - 5	7.039	512.80 512.80	3609.5992	20 - 21	3.972	512.80 512.80	2036.8416
5 - 6	5.027	512.80 512.80	2577.8456	21 - 22	4.045	512.80 512.80	2074.2760
6 - 7	5.026	512.80 512.80	2577.3328	22 - 23	3.704	512.80 512.80	1899.4112
7 - 8	5.026	512.80 512.80	2577.3328	23 - 24	4.045	512.80 512.80	2074.2760
8 - 9	5.027	512.80 512.80	2577.8456	24 - 25	3.991	512.80 512.80	2046.5848
9 - 10	5.026	512.80 512.80	2577.3328	25 - 26	5.302	512.80 512.80	2718.8656
10 - 11	5.026	512.80 512.80	2577.3328	26 - 27	5.644	512.80 512.80	2894.2432
11 - 12	5.888	512.80 512.80	3019.3664	27 - 28	6.448	512.80 512.80	3306.5344
12 - 13	6.242	512.80 512.80	3200.8976	28 - 29	6.313	512.80 512.80	3237.3064
13 - 14	13.382	512.80 512.80	6862.2896	29 - 1	12.381	512.80 512.80	6348.9768
14 - 15	4.976	512.80 512.80	2551.6928	合計	163.925		84060.7400
15 - 16	4.963	512.80 512.80	2545.0264	地盤面 (平均高さ)			512.80000000000000 512.80
16 - 17	0.976	512.80 512.80	500.4928				

No.	長さ l [m]	高さ (KBM) h1 [m] h2 [m]	面積 x (h1+h2) / 2 [m]
a - b	6.140	512.10 512.10	3144.2940
b - c	8.090	512.10 512.10	4142.8890
c - d	6.140	512.10 512.10	3144.2940
d - a	8.090	512.10 512.10	4142.8890
合計	28.460		14574.3660
地盤面 (平均高さ)			512.10000000000000 512.10

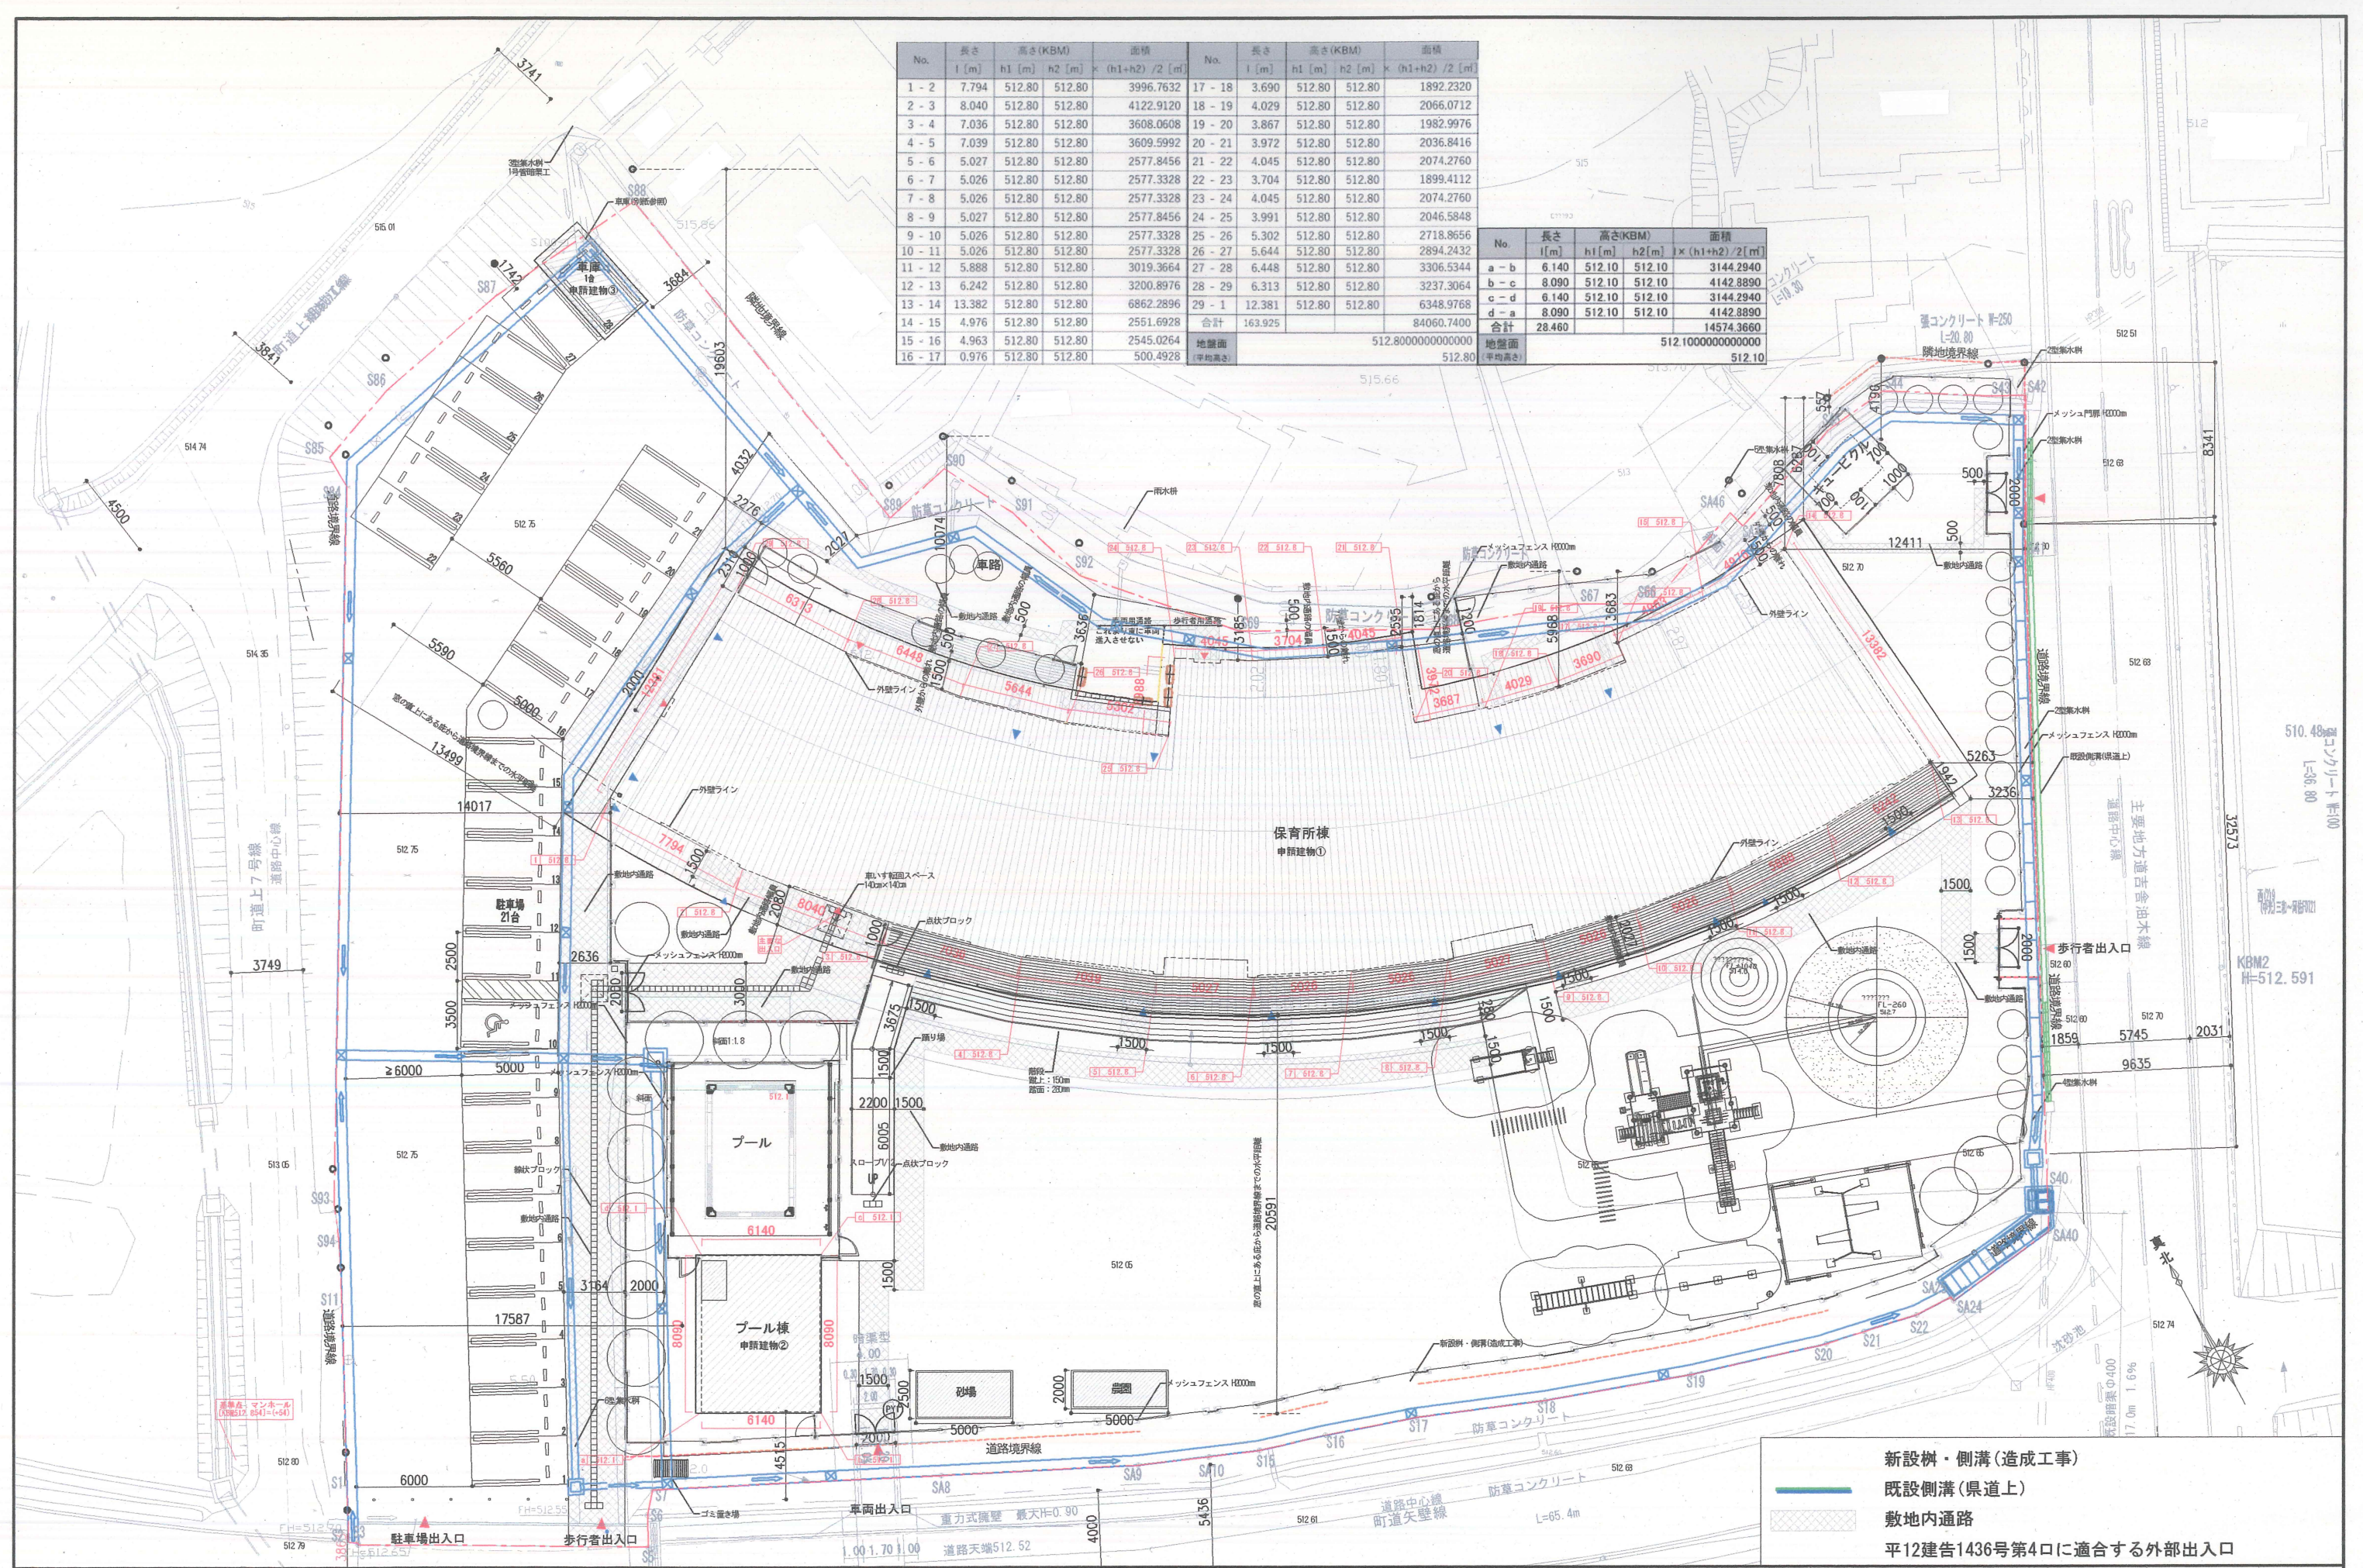

新設樹・側溝(造成工事)
既設側溝(県道上)
敷地内通路
平12建告1436号第4口に適合する外部出入口