


# 土 量 配 分 表

(C箇所)

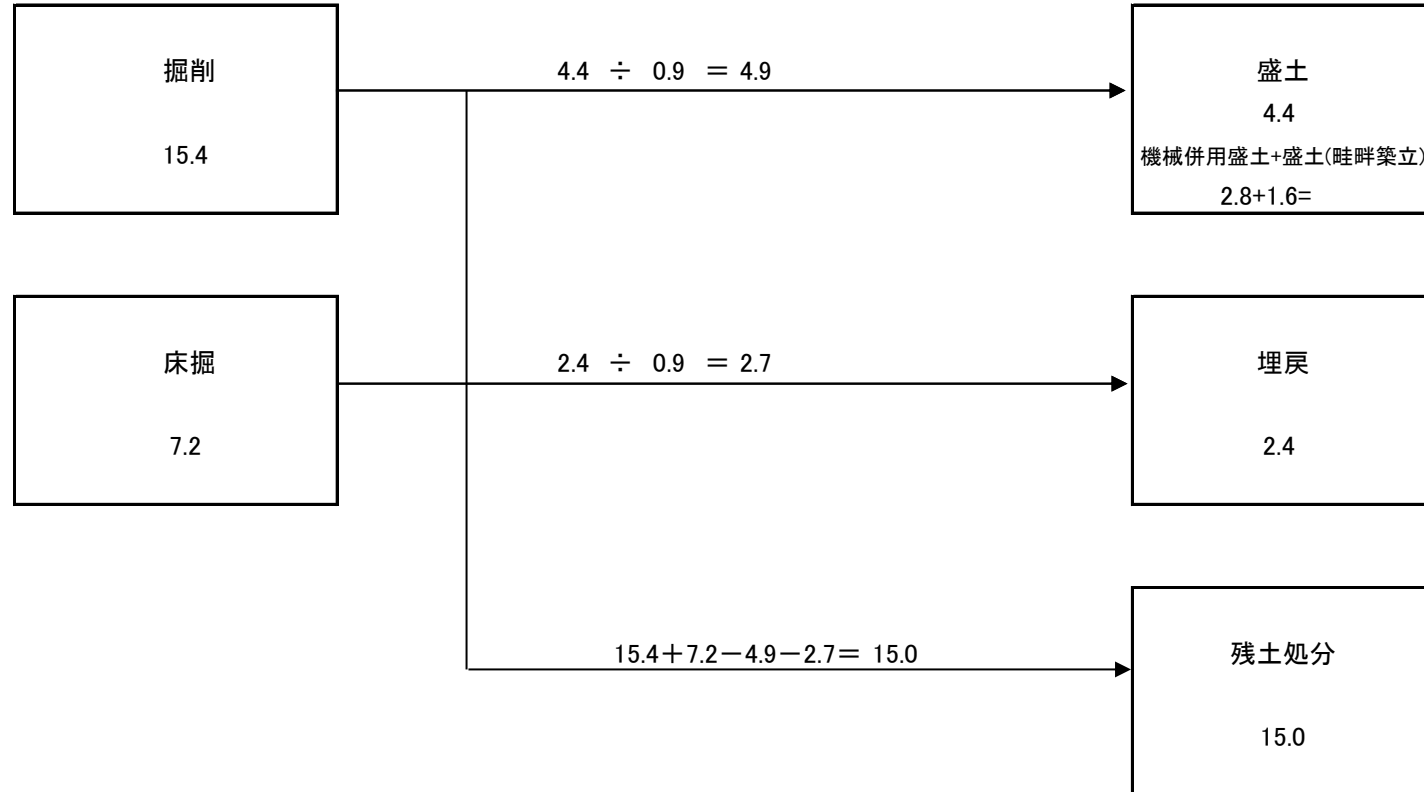

数 量 計 算 書														21/545
種 別 番 号 C箇所	距 離	機 械 掘 削			機 械 床 掘			機 械 併 用 埋 戻			機 械 併 用 盛 土			
		断 面	平 均	数 量	断 面	平 均	数 量	断 面	平 均	数 量	断 面	平 均	数 量	
SECT 0.0	0.0	1.8	-	-	0.9	-	-	0.3	-	-	0.1	-	-	
SECT 4.0	4.0	2.1	1.95	7.8	0.9	0.90	3.6	0.3	0.30	1.2	0.6	0.35	1.4	
SECT 8.0	4.0	1.7	1.90	7.6	0.9	0.90	3.6	0.3	0.30	1.2	0.1	0.35	1.4	
合 計	8.0			15.4			7.2			2.4			2.8	

数 量 計 算 書														21/545
種 別 番 号	距 離	畦 畔 築 立									盛 土 ( 畦 畔 築 立 上 ・ 下 側 )			
		断 面	平 均	数 量	断 面	平 均	数 量	断 面	平 均	数 量	断 面	平 均	数 量	
C箇所(上側) SECT 0.0	0.0										0.2	-	-	
SECT 4.0	4.0			4.0							0.2	0.20	0.8	
SECT 8.0	4.0			4.0							0.2	0.20	0.8	
(下側) SECT 0.0	0.0													
SECT 4.0	4.0			4.0										
SECT 8.0	4.0			4.0										
合 計	16.0			16.0							※土量配分表のみ使用			
												1.6		

数 量 計 算 書														21/545
種 別 番 号 C箇所	距 離	ブ ロ ッ ク 練 積 (t=0cm)			裏 込 砕 石			ブ ロ ッ ク 基 礎 工			取 り 付 け 工			
		断 面	平 均	数 量	断 面	平 均	数 量	断 面	平 均	数 量	断 面	平 均	数 量	
	0.0										0.0	-	-	
	1.1										2.4	1.20	1.3	
SECT 0.0	0.5	2.1	-	-	0.72	-	-				2.4	2.40	1.2	
SECT 4.0	4.0	2.1	2.10	8.4	0.72	0.72	2.9			4.0				
SECT 8.0	4.0	2.1	2.10	8.4	0.72	0.72	2.9			4.0	2.4	-	-	
	0.5										2.4	2.40	1.2	
	1.1										0.0	1.20	1.3	
合 計	11.2			16.8			5.8			8.0			5.0	



工事日数算定表(敷鉄板) C箇所

令和7年10月以降

1. 日当り作業量算定表

名称		規格	単位当	日当	対象	掛 人 員 台 数	日数
			掛	業 量	業 量		
人	掘削	土砂		4 ㎡/日			
		岩塊・玉石		3 "			
		土砂		2.4 "			
力	床掘	岩塊・玉石		1.7 "			
	積込	土砂		7.1 "			

敷鉄板運搬距離算定図

C箇所

敷鉄板施工延長	51.0m	敷鉄板規格	22×1,524×3,048mm	敷鉄板1枚当たり面積	4.6m2/枚	敷鉄板1枚当たり重量	802kg/枚
運搬距離							
敷鉄板設置面積	51.0(m)×3(m)=	153.0m2					
敷鉄板使用枚数	153.0(m2)/4.6(m2/枚)=	34枚					
敷鉄板総重量	34(枚)×(802/1000)=	27.27t					

